


PROTECTIVE POLISHING TREATMENT FOR BODYWORK



- Guarantees an incredible long-lasting shine.
- Forms a film which guarantees care and protection.
- Contains a combination of PTFE and reactive silicones.

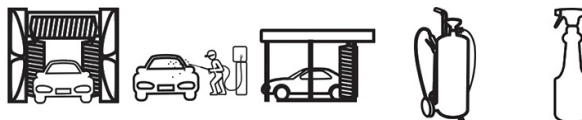

SUGGESTIONS

Using TEKNOBOND PTFE S once a month guarantees a visible improvement in the shine and finish of the vehicle, as well as an increased flow of water both over bodywork and the windscreen.

DESCRIPTION

TEKNOBOND PTFE S represents an important step forward in the care and protection of vehicles. It is a long-lasting polishing and protective foaming treatment for vehicle bodywork which contains a unique combination of PTFE and reactive synergic silicones guaranteeing the results for at least 60 days. TEKNOBOND PTFE S is the only product which synergically combines reactive silicone polymers with the properties of PTFE to reduce surface tension. It forms a film which guarantees care and protection. It protects the vehicle from atmospheric agents, it provides shine, aids drying and avoids the adhesion of dirt to bodywork and glass.

It guarantees "easy to clean" properties, facilitating the removal of insects and bird excrement from bodywork.

Its foam, which creates a scenographic effect, facilitates the total coverage of surfaces. In addition, by prolonging the contact time, it increases the effectiveness of the product.

Further applications of TEKNOBOND PTFE S will reinforce protection and duration over time.

Leaves a pleasant fragrance of green apple in the air.

PROTECTIVE POLISHING TREATMENT FOR BODYWORK

PHYSICAL AND CHEMICAL CHARACTERISTICS

Appearance	Clear liquid
Colour	Blue
Fragrance	Apple
Specific weight	0.980 ± 0.010 g/ml
Solubility in water	Complete in all ratios
pH	Approximately 4



High

AVAILABLE PACKAGING

20L container - 016TKBOTN20

USE MODALITY

Automatic car washes: dose 40-60 ml per vehicle, spray the watery solution evenly over the entire vehicle before the final waxing and drying stage.

Manual car washing: dilute 50 ml of product in an 8-10 litre watering can and apply evenly over the entire vehicle.

Rinse and dry.

Self-service bays: use in place of wax. Dose 30-50 ml per vehicle, distributing over the entire body. Rinse with demineralised water.

FOR PROFESSIONAL USE ONLY.

The product maintains its properties when properly stored in an unopened package, in a cool and dry place away from light and heat sources, at a temperature between 5°C and 35°C.

CORRELATED PRODUCTS ACCESSORIES

Nebulizzatore per prodotti acidi 6L
01AA720035

Flacone 750ml
013A574001



Pompetta trigger spray
011A210050

Nebulizzatore per prodotti alcalini 6L
01AA720026

